




(1) Reddy Stake Tree Stake System


Set root ball 2" above finish grade

**NOTE:** Install tree stake against, but not through the tree ball. Tree stake shall be placed on the north side of the tree. Where tree is located adjacent to street, sidewalk, or trail, tree stake shall be installed parallel to direction of travel.

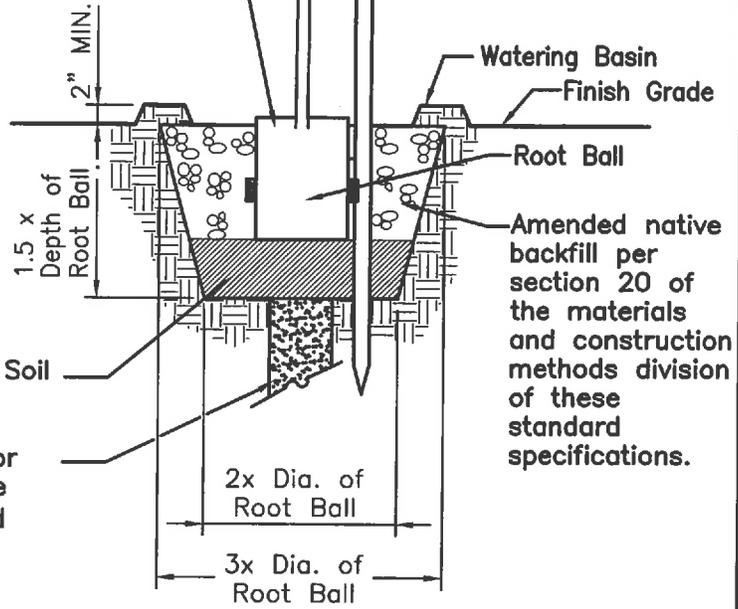

Where soil analysis reveals poor draining soil conditions, provide 12" dia. x 3'-0" deep augered hole. Backfill with class 2 permeable aggregate.

**TREE PLANTING**

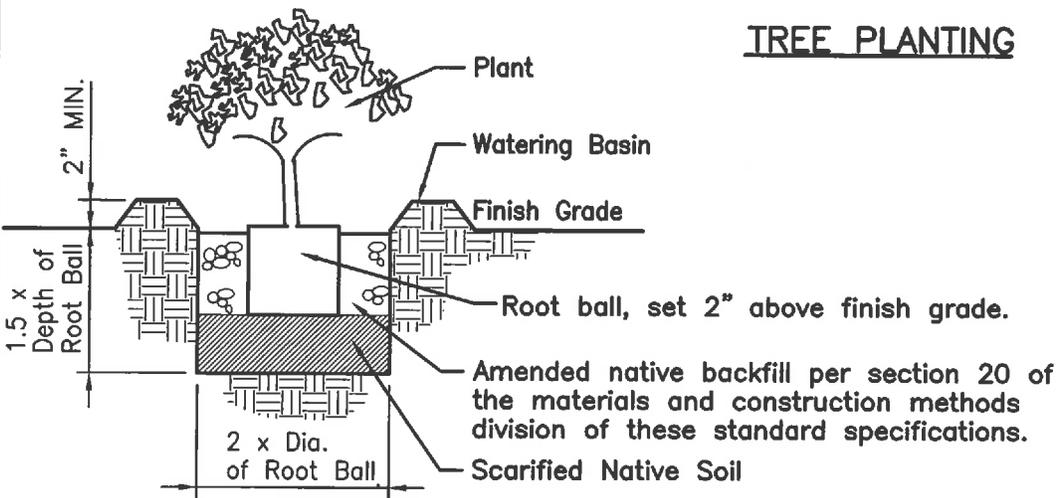

**SHRUB PLANTING**

REVISION

**CITY OF WOODLAND**  
 COMMUNITY DEVELOPMENT DEPARTMENT  
 ENGINEERING DIVISION

APPROVED BY   
 DATE 08/08/18 BRENT MEYER, CITY ENGINEER

Tree and Shrub Planting

1325